




SITELITES

12,000 LUMEN LED QUAD WORK LIGHT TRIPOD STAND

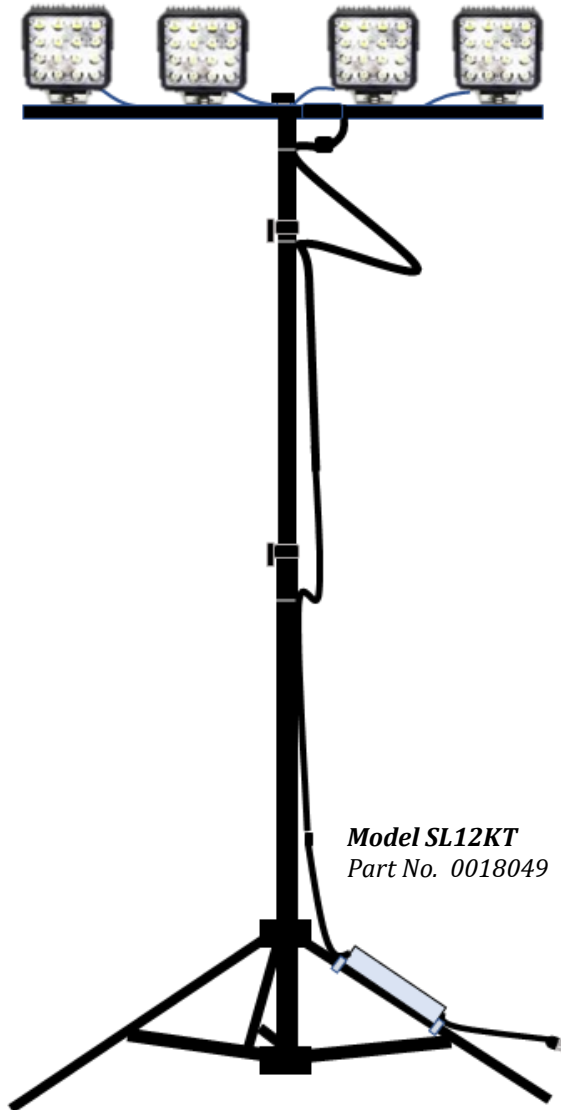

SiteLites™

KEY FEATURES & BENEFITS

- Quad 360° light fixture mounted adjustable 4-8.5' tripod stand, each using four LED heads producing 3000 lumens of light for a combined illumination of 12,000 lumens
- Four 360° vertically and horizontally independently adjustable heads; multi-angle tilt and swivel fixture design
- Multi-fin heat sink keeps lights cool to the touch
- Battery Discharge Protection, disconnects at 11 VDC
- IP66 Rated, Water Resistant
- AC Operation: 100 VAC to 260 VAC, 47 to 63 Hz
- DC Operation: 11 to 30 VDC; can operate on batteries or with solar panels
- Rated Life 50,000 hr.
- AMA recommended 3000K to 4000K neutral white light
- Light Weight & Easy to Transport
- *Three SL12KT models available:*
 - 1) *SL12KT-H (Flood & Spot Hybrid);*
 - 2) *SL12KT-F (All Floods); and*
 - 3) *SL12KT-S (All Spots)*

*Model SL12KT
Part No. 0018049*

APPLICATIONS

SiteLites portability is ideal for a broad range of construction and maintenance applications. These lights are perfect for brightly lighting any work area to help you do your work and see operations in low light or dark environments. Some environments like:

- Facilities Managers
- Maintenance & Garages
- Construction Sites
- Assembly
- Mining
- Tent, Tunnel, & Outdoor Spaces
- Portable Shelters
- Utilities
- Emergency Services or Sites


We Love to Design and Build!

www.custom-mfg-eng.com/SiteLites

Custom Manufacturing & Engineering™ ♦ ISO 9001:2008 & AS9100C Registered, ISO 17025 Accredited
3690 70th Avenue North, Pinellas Park, FL 33781 USA ♦ TEL: 727.547.9799 Ext. 1202 ♦ FAX: 727.541.8822

12,000 LUMEN LED QUAD WORK LIGHT TRIPOD STAND

SPECIFICATIONS

Item	Temporary Job Site Light
Lumens	12,000 Effective Lumens (3800 Raw Lumens per head)
Number of Lamp Heads	4 ea. 360° vertically and horizontally independently adjustable heads
AC & DC Voltage	AC Operation: AC 100 VAC to 260VAC, 47Hz to 63Hz; DC Operation: 11 VDC to 30VDC
Battery Discharge	Battery Discharge Protection, disconnects at 11 VDC
Light Temperature	4,000 Kelvin
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Cord/Length	12-ft 18/3 SJTW orange AC power cord, and a 25-ft yellow DC Cable
Max. Extension Height	Extendable to 8 1/2 ft
Light Source	CREE LEDs,
Rated Life	50,000 hr
Light Distribution	Medium Floods with 60 degree beam pattern; spots are 60 degree beam pattern
IP Rating	IP67 Light Heads, System overall IP66
Construction	LED Head: Cast aluminum housing, durable polycarbonate lenses; Tripod powder coated
Safety Rated	Power Supply is UL recognized Type HL 
Compliance	The power supply complies with global certificates per UL/ CUL/ ENEC/ CB/ CE, including UL8750, ENEC EN61347-2-13, EN62384 of lighting regulations
Protections	Short circuit, over voltage, and over temperature,
Weight	15 lb
Warranty	Limited 1 year warranty

SiteLites™

SITELITES 12,000 LUMEN WORK SITE LED LIGHTING TRIPOD

